

## **HOT MAX-S**

Mibrasa oven with heated holding drawers and top heated cupboard



## **FEATURES**

## OUR CHARCOAL OVENS WITH **DRAWERS**



## **HEATED HOLDING-**

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately controlthe air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

With the HOT series take full control by optimizing the residualheat from the Mibrasa® oven to hold ingredients in three temperature zones on the unit. The seamless lineal design makesthe Mibrasa® HOT the most comprehensive charcoal oven station for any chef that prioritizes an effective and cost-efficient kitchen.

## **TECHNICAL INFORMATION**


Reference	HMB HOT AC 75	
Fire up time¹	45 min	
Cooking temperature	250 - 350 °C	
Initial charcoal load¹	10 kg	
Production*	70 kg/h	
Charcoal load duration <sup>2</sup>	7 h	
Equivalent power*	3,5 kW	
Exhaust rate	2800 m3/h	
Net weight <sup>3</sup>	630 kg	
Crated weight	760 kg	
Crate dimensions (WxDxH)	1) 900 x 800 x 1350 mm 2) 900 x 1000 x 2050 mm	

\*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal 3. Weight with accessories included

#### PAX PER SERVICE\*



## **GRILL DIMENSIONS**



## **INCLUDED ACCESSORIES**

- Grill [GT75]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Ember poker [PK75]
- Grill brush [CEP]
- Heating rack top cabinet[SBAC]
- Gastronorms [1x GN1/2, 1x GN1/1]

## **RECOMMENDED ACCESSORIES**

- Firebreak-dissipating filter [FB-DF]
- Extra grill [GT75]
- Removable grease collector [REG1P/2]
- Casters [WINOX]
- Consult catalogue for kitchenware and grillware

QUALITY GUARANTEE











Mibrasa® Charcoal Ovens S.L C/Joan Rovira i Bastons, 26 17230 Palamós - Spain +34 972 601 942 - mibrasa@mibrasa.com www.mibrasa.com






Mibrasa oven with heated holding drawers and top heated cupboard


## Front view



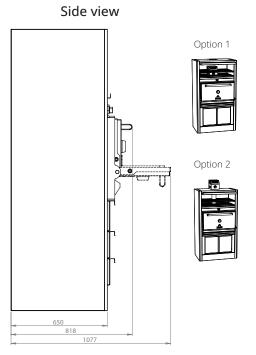

Dimensions in mm Revit drawings available on request at mibrasa@mibrasa.com


Total height option 2: 2141 mm

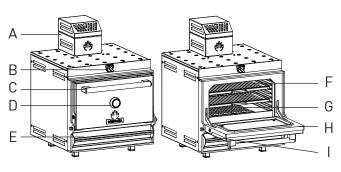

Α	Firebreak-dissipating filter
В	Upper damper
С	Door handle
D	Thermometer
Е	Lower damper/ash collector
F	Cooking grills
G	Charcoal grids
Н	Door
1	Grease collector

## **GASTRONORM CAPACITY**


## HOT DRAWER (x3)



Residual temperatures of the drawers between 55°C and 90°C based on oven working at 300°C. Maximum gastronorm height 6 cm.

#### Compatible with Mibrasa GN

## **HEATING RACK (x2)**



Residual temperatures of the heating rack in the top cabinet approximately 150°C, based on the oven working at 300°C.

## **CUSTOMIZE**

## DOOR COLOR





**BLACK** 







YELLOW

STAINLESS STEEL



**BLUE** 

## **EDITION**







GOLD

COPPER







WOOD\* TITANIUM SILVER

The Edition finishes are applied to the logos, door handle and the thermometer casing. \*Only on the door handle (logos and thermometer casing in silver)

## **INSTALLATION GUIDELINES** AND SAFETY STANDARDS

Clearances to construc- tion/other appliances from oven	76 mm
Clearances of flamma- ble materials from oven	300 mm
Clearance of workspace from front of the oven	1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual

for further information.

Specifications and design are subject to change without notice.



# **HOT MAX-M**

Mibrasa oven with heated holding drawers and top heated cupboard



## **FEATURES**

## OUR CHARCOAL OVENS WITH **DRAWERS**



## **HEATED HOLDING-**

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately controlthe air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

With the HOT series take full control by optimizing the residualheat from the Mibrasa® oven to hold ingredients in three temperature zones on the unit. The seamless lineal design makesthe Mibrasa® HOT the most comprehensive charcoal oven station for any chef that prioritizes an effective and cost-efficient kitchen.

## **TECHNICAL INFORMATION**

- (		
Reference	HMB HOT AC 110	
Fire up time¹	45 min	
Cooking temperature	250 - 350 °C	
Initial charcoal load¹	15 kg	
Production*	100 kg/h	
Charcoal load duration <sup>2</sup>	8 h	
Equivalent power*	5 kW	
Exhaust rate	3200 m3/h	
Net weight <sup>3</sup>	757 kg	
Crated weight	897 kg	
Crate dimensions (WxDxH)	1) 1100 x 1100 x 1350 mm 2) 1100 x 1100 x 2050 mm	

\*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal 3. Weight with accessories included

#### PAX PER SERVICE\*



## **GRILL DIMENSIONS**



## **INCLUDED ACCESSORIES**

- Grill [GT110]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Ember poker [PK110]
- Grill brush [CEP]
- Heating rack top cabinet[SBAC]
- Gastronorms [1x GN1/2, 1x GN1/1]

## **RECOMMENDED ACCESSORIES**

- Firebreak-dissipating filter [FB-DF]
- Extra grill [GT110]
- Removable grease collector [REG3/4]
- Casters [WINOX]
- Consult catalogue for kitchenware and grillware

QUALITY GUARANTEE

















Mibrasa oven with heated holding drawers and top heated cupboard

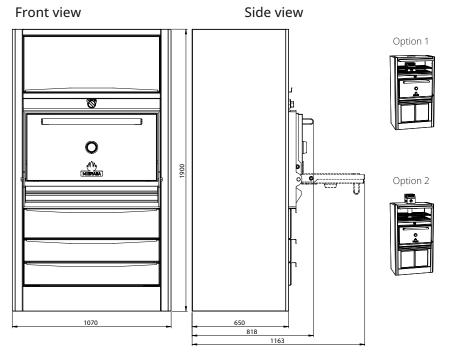

Dimensions in mm Revit drawings available on request at mibrasa@mibrasa.com


Total height option 2: 2141 mm

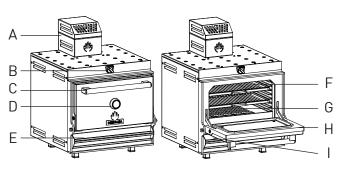

_	
Α	Firebreak-dissipating filter
В	Upper damper
С	Door handle
D	Thermometer
Е	Lower damper/ash collector
F	Cooking grills
G	Charcoal grids
Н	Door
I	Grease collector

## **GASTRONORM CAPACITY**


## HOT DRAWER (x3)



Residual temperatures of the drawers between 55°C and 90°C based on oven working at 300°C Maximum gastronorm height 6 cm.

Compatible with Mibrasa GN

## **HEATING RACK (x2)**



Residual temperatures of the heating rack in the top cabinet approximately 150°C, based on the oven working at 300°C.

## **CUSTOMIZE**

## **DOOR COLOR**





**BLACK** 







YELLOW

STAINLESS STEEL



**BLUE** 

## **EDITION**







GOLD

COPPER







WOOD\*

TITANIUM SILVER

The Edition finishes are applied to the logos, door handle and the thermometer casing.

\*Only on the door handle (logos and thermometer casing in silver)

## **INSTALLATION GUIDELINES AND SAFETY STANDARDS**

Clearances to construc- tion/other appliances from oven	76 mm
Clearances of flamma- ble materials from oven	300 mm
Clearance of workspace from front of the oven	1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual

for further information.

Specifications and design are subject to change without notice.



# HOT MAX-L

Mibrasa oven with heated holding drawers and top heated cupboard



## **FEATURES**

## OUR CHARCOAL OVENS WITH **DRAWERS**



## **HEATED HOLDING-**

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately controlthe air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

With the HOT series take full control by optimizing the residualheat from the Mibrasa® oven to hold ingredients in three temperature zones on the unit. The seamless lineal design makesthe Mibrasa® HOT the most comprehensive charcoal oven station for any chef that prioritizes an effective and cost-efficient kitchen.

## **TECHNICAL INFORMATION**

Reference	HMB HOT AC 160	
Fire up time¹	45 min	
Cooking temperature	250 - 350 °C	
Initial charcoal load¹	18 kg	
Production*	120 kg/h	
Charcoal load duration <sup>2</sup>	8 h	
Equivalent power*	6 kW	
Exhaust rate	3500 m3/h	
Net weight <sup>3</sup>	946 kg	
Crated weight	1098 kg	
Crate dimensions (WxDxH)	1) 1100 x 1100 x 1350 mm 2) 1100 x 1100 x 2050 mm	

\*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal 3. Weight with accessories included

#### PAX PER SERVICE\*



## **GRILL DIMENSIONS**



## **INCLUDED ACCESSORIES**

- Grill [GT160]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Ember poker [PK160]
- Grill brush [CEP]
- Heating rack top cabinet[SBAC]
- Gastronorms [1x GN1/2, 1x GN1/1]

## **RECOMMENDED ACCESSORIES**

- Firebreak-dissipating filter [FB-DF]
- Extra grill [GT160]
- Removable grease collector [REG3/4]
- Casters [WINOX]
- Consult catalogue for kitchenware and grillware

QUALITY GUARANTEE











Mibrasa® Charcoal Ovens S.L C/Joan Rovira i Bastons, 26 17230 Palamós - Spain +34 972 601 942 - mibrasa@mibrasa.com www.mibrasa.com






Mibrasa oven with heated holding drawers and top heated cupboard

# Side view Front view Option 1 Option 2 1070

Dimensions in mm Revit drawings available on request at mibrasa@mibrasa.com


Total height option 2: 2141 mm

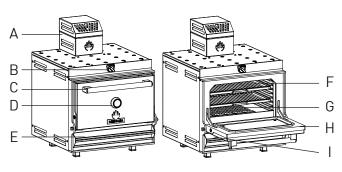

Α	Firebreak-dissipating filter
В	Upper damper
С	Door handle
D	Thermometer
Е	Lower damper/ash collector
F	Cooking grills
G	Charcoal grids
Н	Door
1	Grease collector

## **GASTRONORM CAPACITY**


## HOT DRAWER (x3)



Residual temperatures of the drawers between 55°C and 90°C based on oven working at 300°C. Maximum gastronorm height 6 cm.

#### Compatible with Mibrasa GN

## **HEATING RACK (x2)**



Residual temperatures of the heating rack in the top cabinet approximately 150°C, based on the oven working at 300°C.

## **CUSTOMIZE**

## **DOOR COLOR**





**BLACK** 







YELLOW





**BLUE** 

## **EDITION**







GOLD

COPPER







WOOD\* TITANIUM SILVER

The Edition finishes are applied to the logos, door handle and the thermometer casing. \*Only on the door handle (logos and thermometer casing in silver)

## **INSTALLATION GUIDELINES AND SAFETY STANDARDS**

Clearances to construc- tion/other appliances from oven	76 mm
Clearances of flamma- ble materials from oven	300 mm
Clearance of workspace from front of the oven	1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual

for further information.

Specifications and design are subject to change without notice.