



HOSHIZAKI

UNDERCOUNTER REFRIGERATOR

RT-158MA-S
RT-156MA-S

A-FIT cabinets are designed to show outstanding performance and durability backed by Hoshizaki's many years of experience and high-quality standard. The cabinets combine ergonomic design with high functionality and strong cooling capacity to meet customer high expectations.



KEY FEATURES








- > Enhanced cooling capacity with larger evaporator and stronger cooling fan
- > Cleaning-free condenser
- > Ergonomic full-height door
- > HACCP complied design
- > Forced evaporation system
- > Smart auto-defrost system
- > Field reversible door
- > LED interior lighting
- > Removable door gaskets

CERTIFICATION



DIMENSIONS & SPECIFICATION

RT-158MA-S

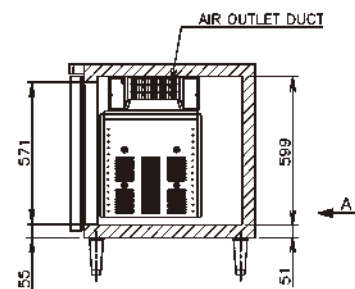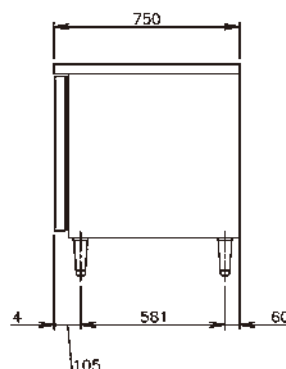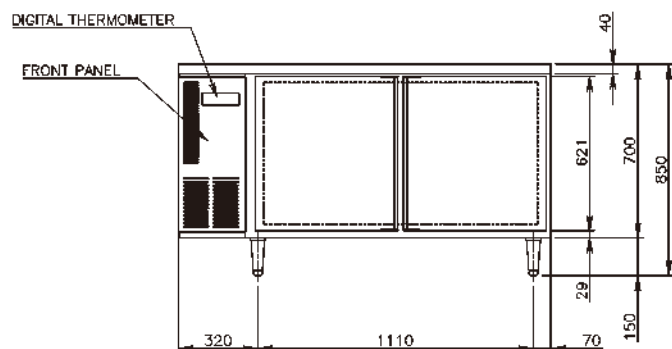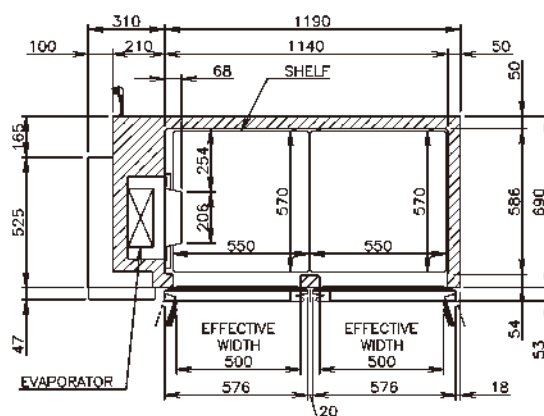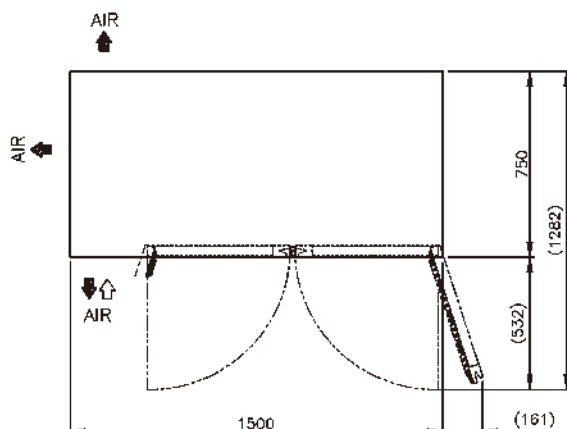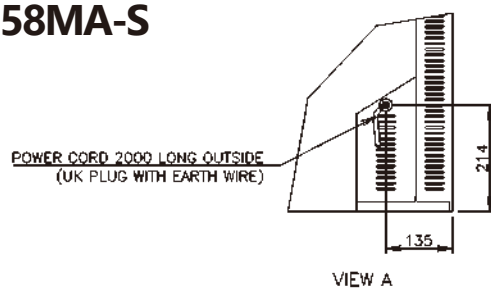

| MODEL | RT-158MA-S | RT-156MA-S |
|-----------------------------------|--|---|
| TEMP. CONTROL | -6 to 12°C | -6 to 12°C |
| EFFECTIVE CAPACITY | 420 L | 318 L |
| WEIGHT | 87 kg (Gross: Approx. 92kg) | 81 kg (Gross: Approx. 86kg) |
| OUTSIDE DIMENSIONS W x D x H (mm) | 1500 x 750 x 850(-880) | 1500 x 600 X 850(-880) |
| PACKAGE W x D x H (mm) | 1565 x 830 x 790 | 1565 x 680 x 790 |
| POWER SUPPLY | 1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A) | 1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A) |
| ELECTRIC CONSUMPTION | 260W Heater: 189W Refrigeration 245W Defrost: 165W | 260W Heater: 189W Refrigeration 245W Defrost: 165W |
| AMPERAGE | Rated 2.0A | Rated 2.0A |
| SHELF | 4pcs. | 4pcs. |
| OPERATING CONDITION | Ambient Temperature:5-38°C Voltage Range: Rated Voltage ±6% | Ambient Temperature: 5-38°C Voltage Range: Rated Voltage ±6% |

We reserve the right to make changes in specification and design without prior notice. WWW.HOSHIZAKI.COM



HOSHIZAKI

18 Boon Lay Way #01-102 Tradehub 21, 609966
TEL 6225 2612 FAX 6225 3219 www.hoshizaki.com.sg